

Model 707 Electronic Data Terminal
Battery Pack Option (TI Part No. 2310446-0001)
Installation Instructions



DESCRIPTION

The battery pack consists of two batteries of four cells each. A two-wire cable with a connector is attached to each battery.

PARTS

This kit includes the following:


<u>Qty.</u>	<u>TI Part No.</u>	<u>Description</u>
2	2310477-0001	Battery Pack

INSTALLATION PROCEDURE

NOTE:

Before you install the battery pack, plug the terminal into an ac power outlet and place the power switch in the OFF position.

1. Place the terminal upside down with the front edge of the terminal facing you.
2. Remove the two battery compartment doors by pushing down slightly on the ribbed area on each door, and sliding the doors toward the front.

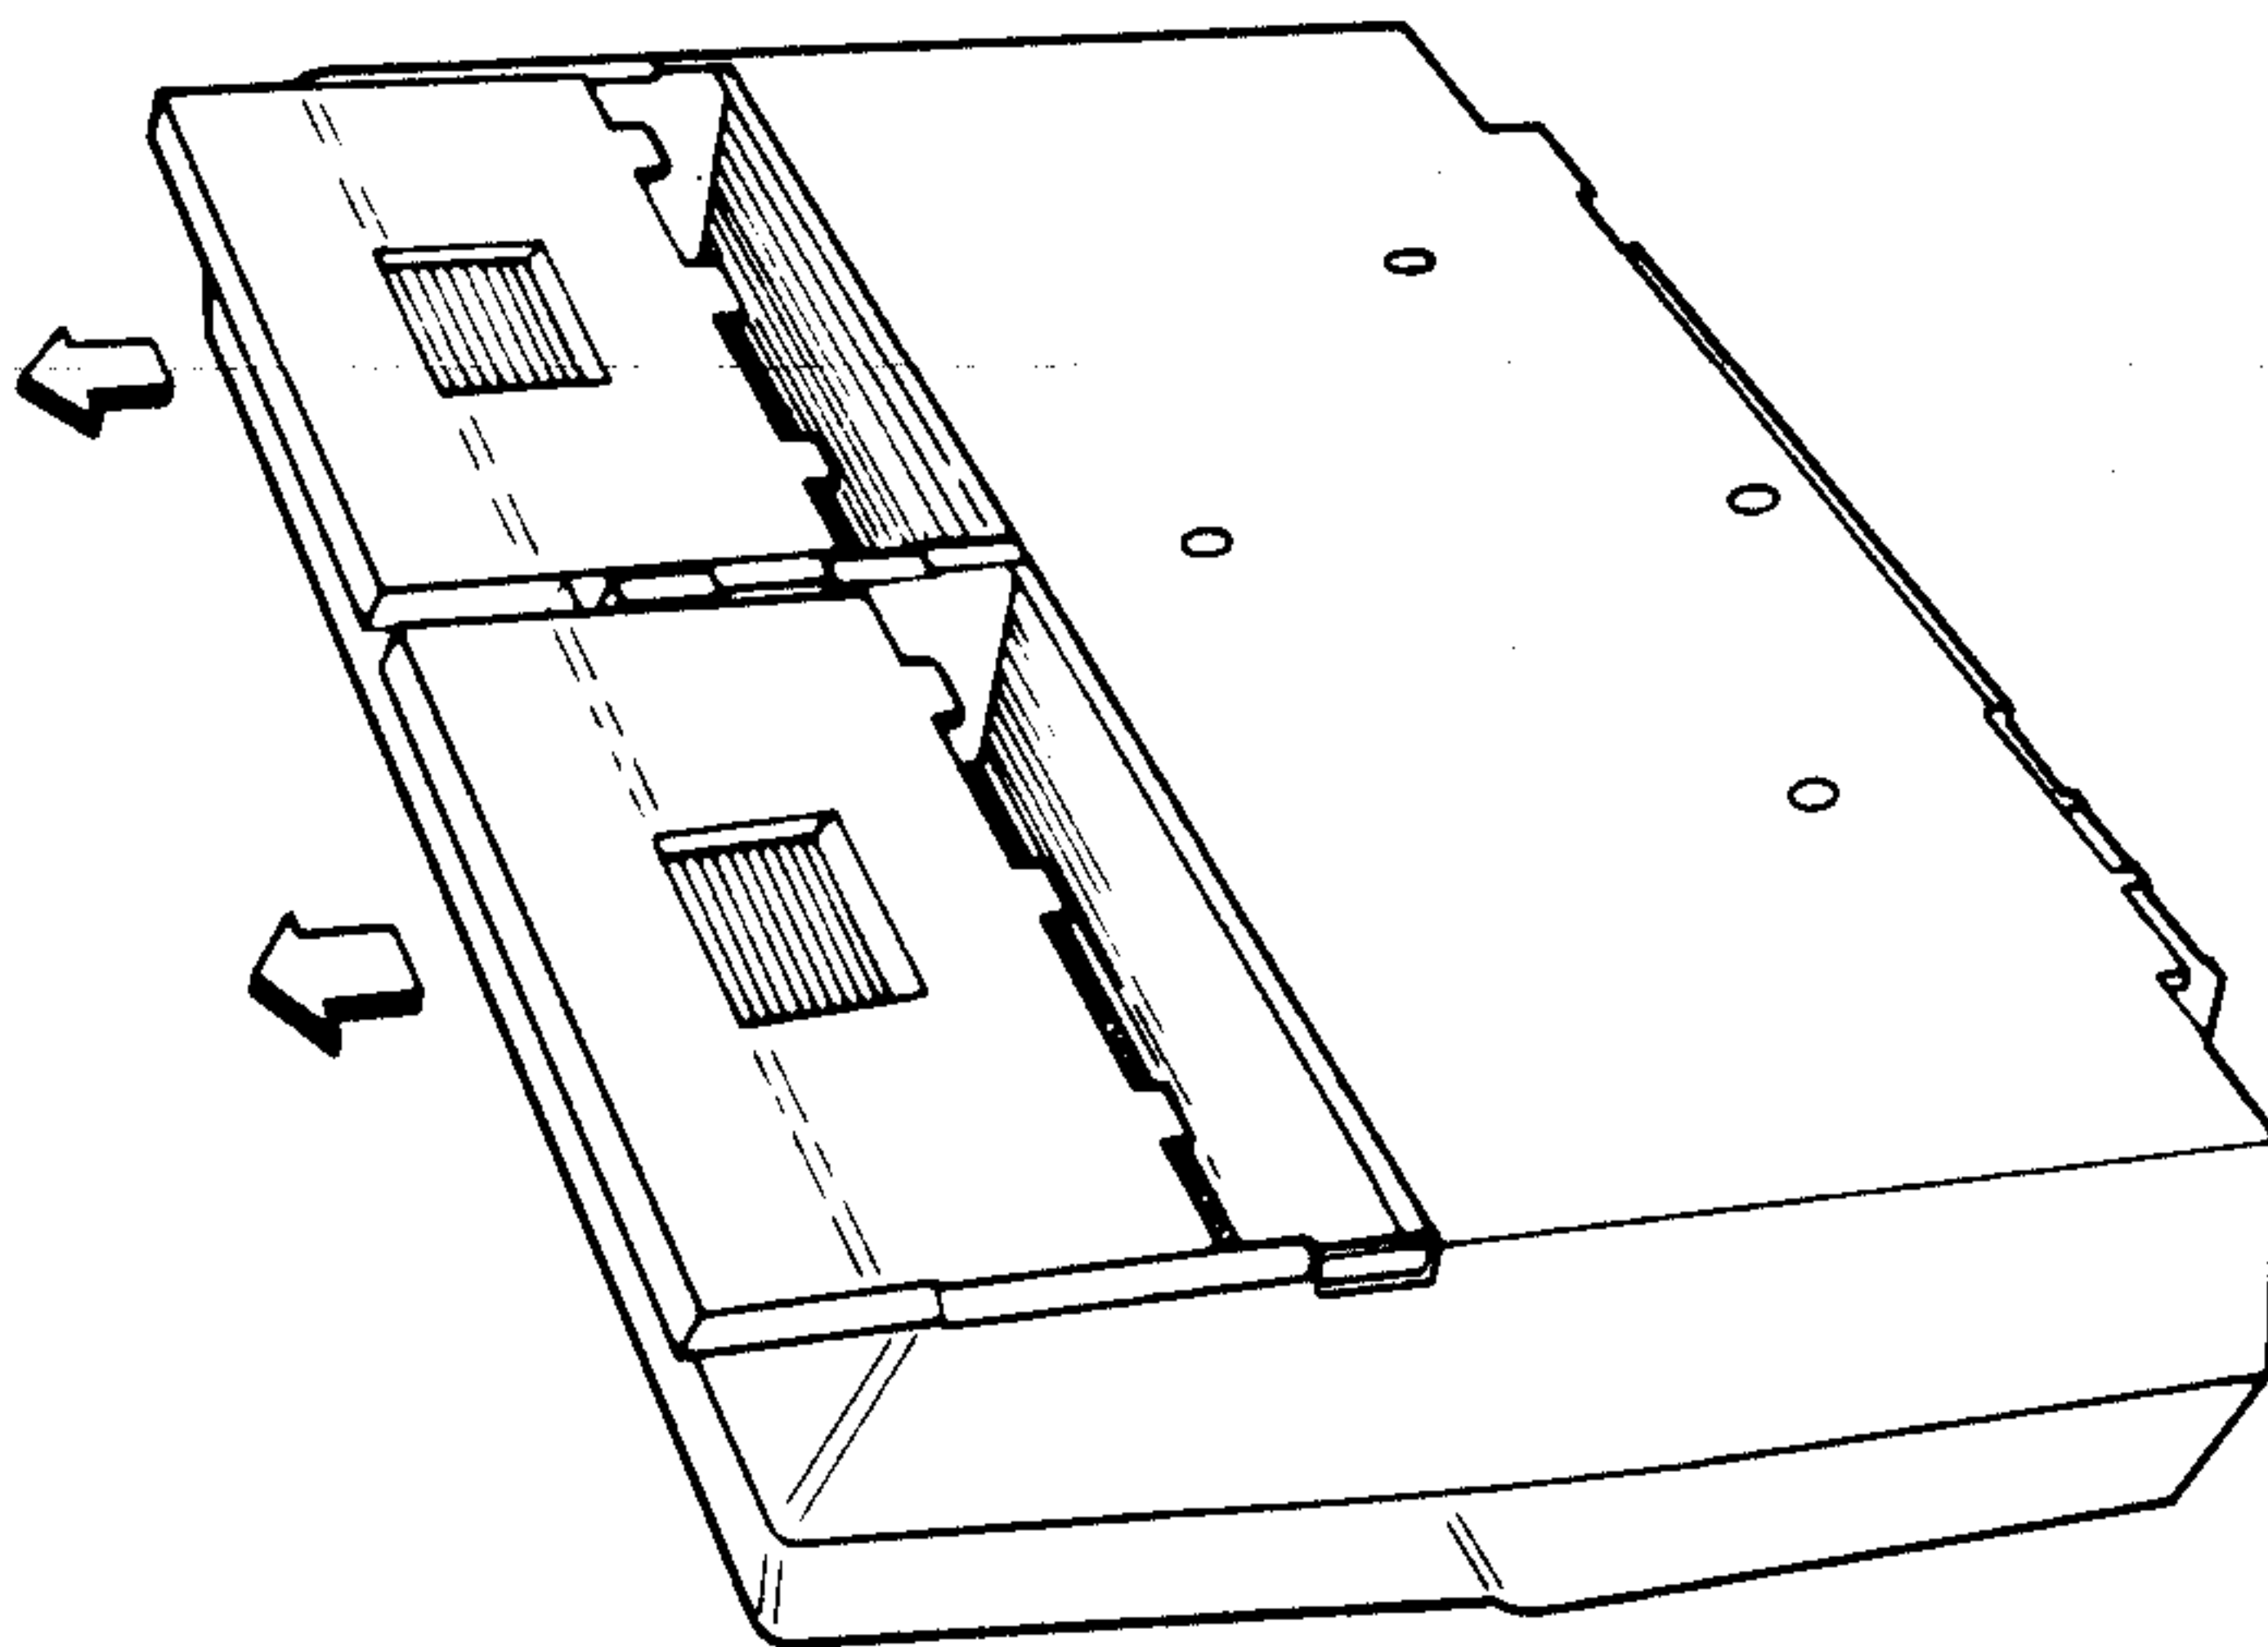


3. Connect the connector of each battery unit to the connector in each battery compartment.

CAUTION

The battery connectors mate easily if they are oriented properly. Damage to the terminal may result from forcing either connection.

4. To install the batteries, tip the terminal on its front edge and set each battery pack into the bottom of its battery compartment. Make sure the wires are pushed down so they don't get in the way. Pivot each battery pack into its compartment.

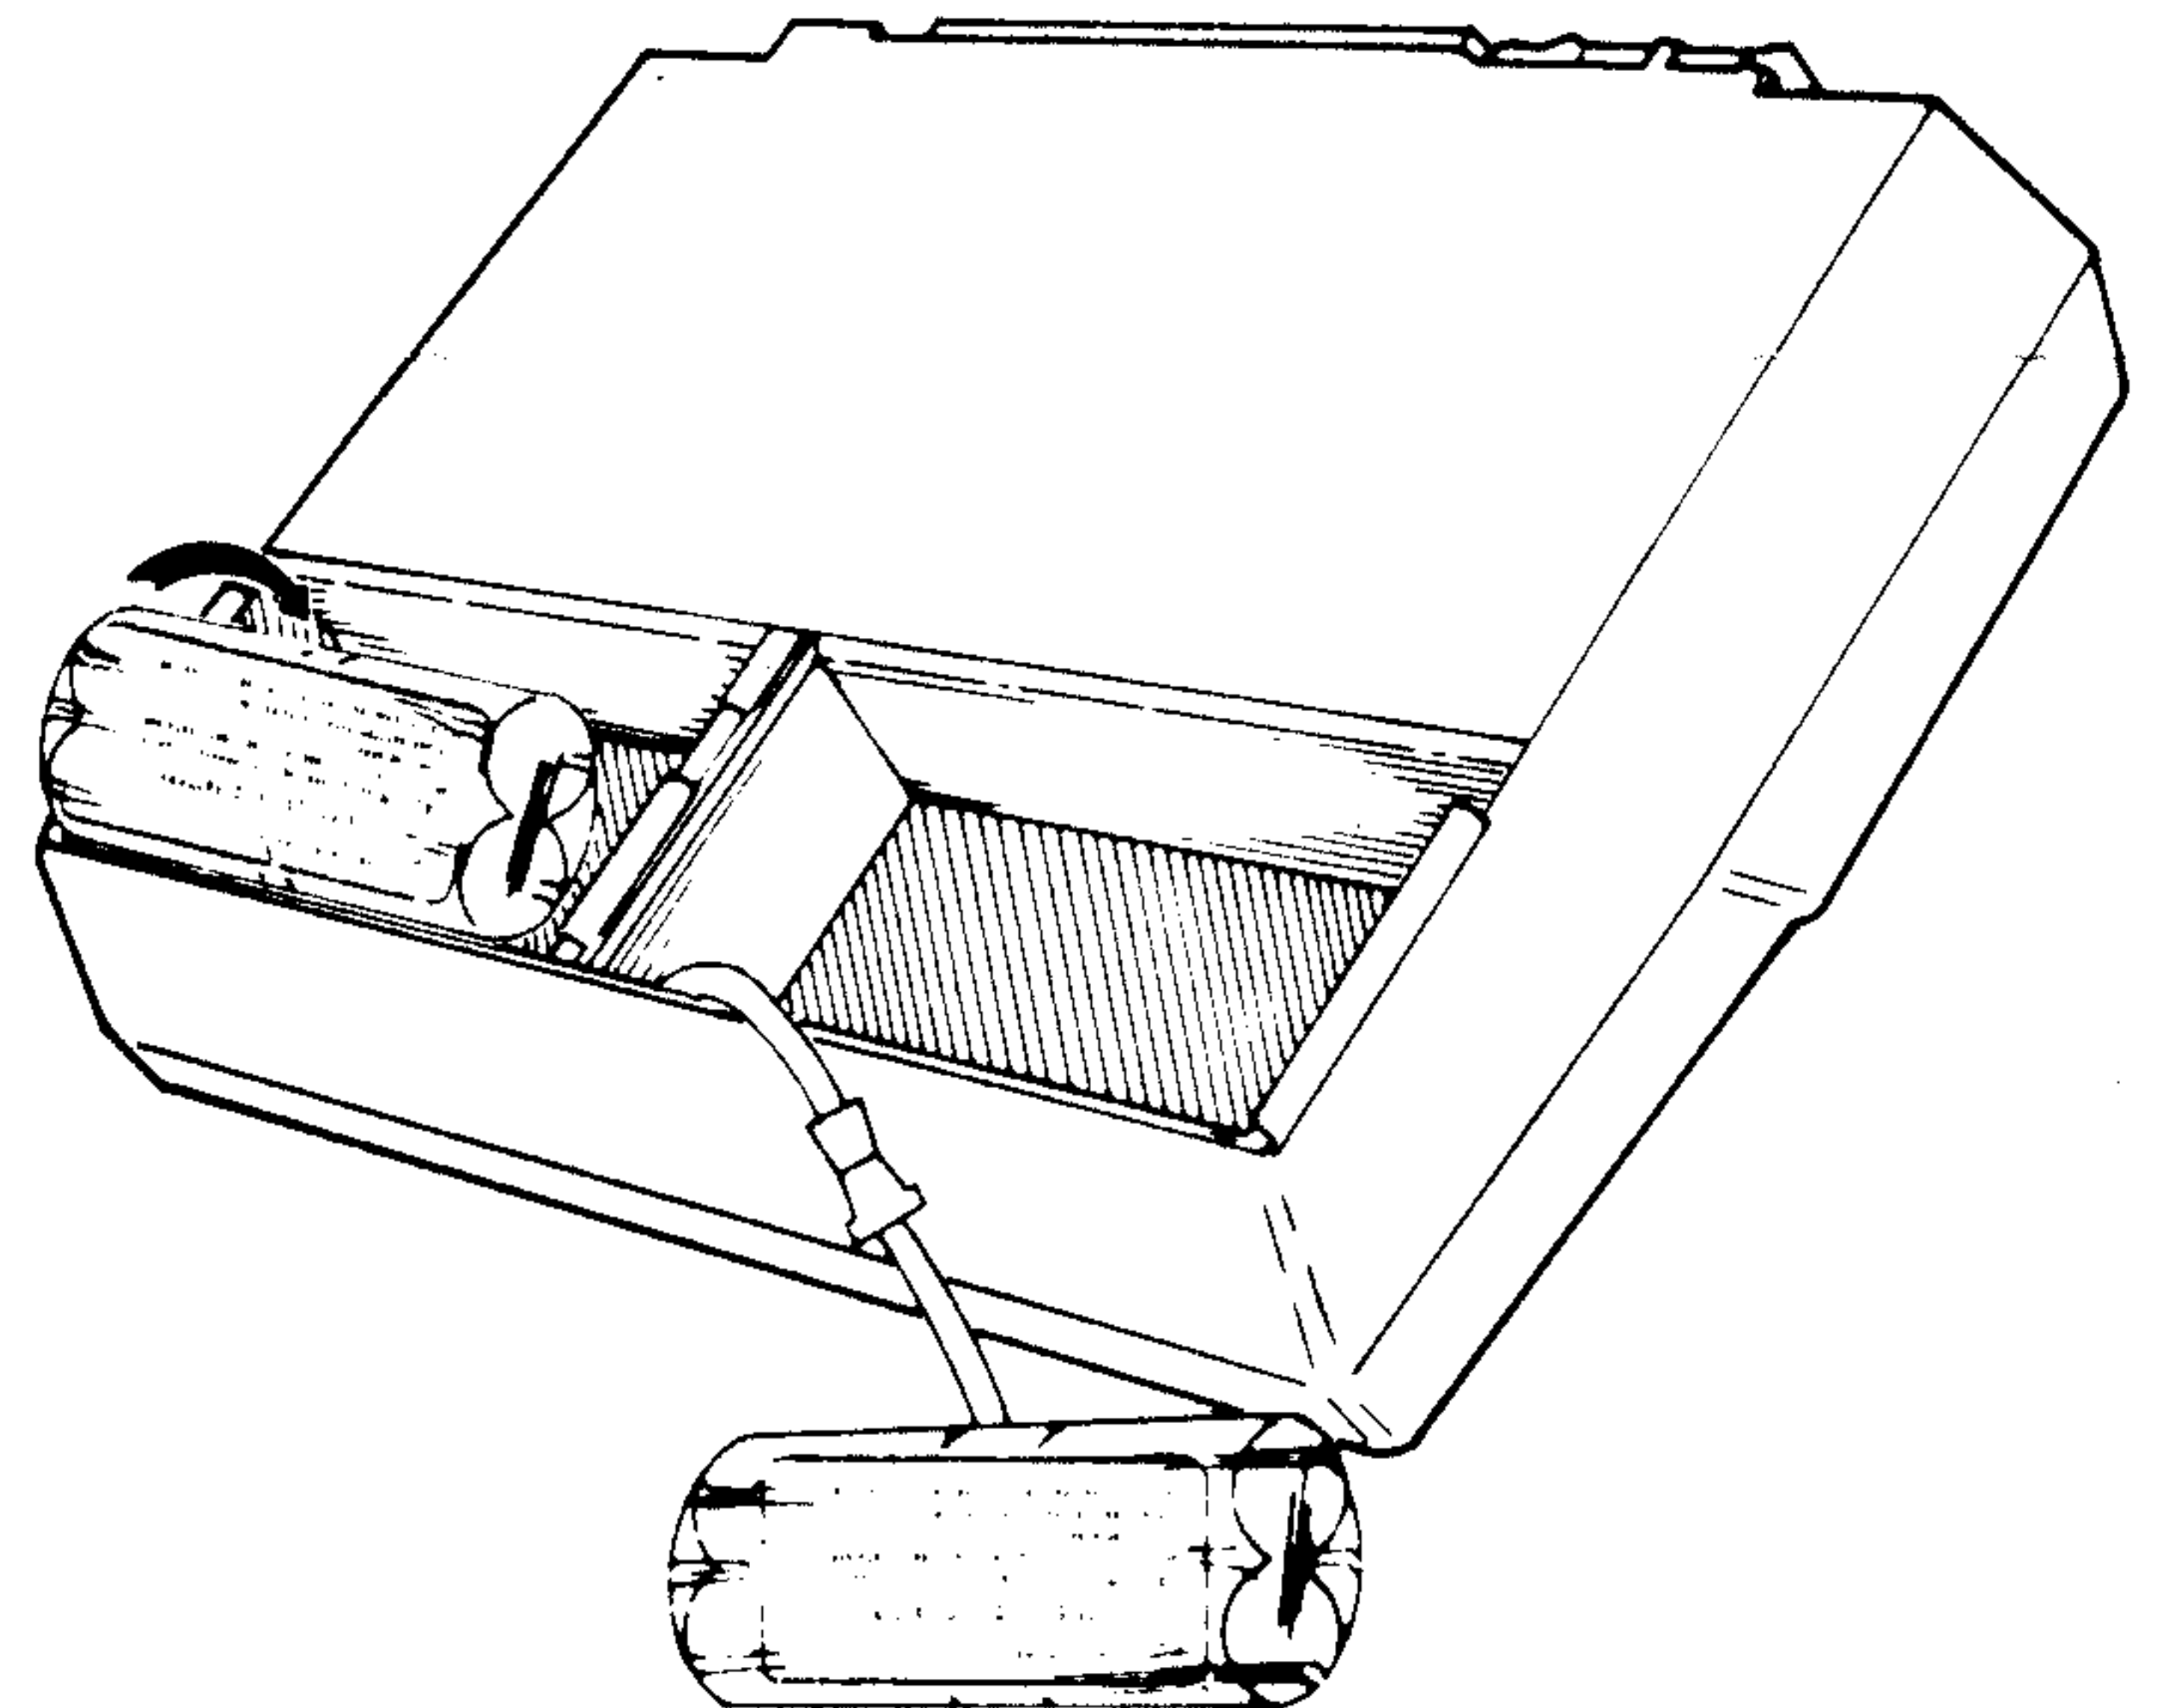

5. Lay the terminal down and replace the battery doors.
6. Turn the terminal right side up.

BATTERY REMOVAL

Before removing the batteries, we recommend that you unplug the terminal from the ac power outlet. Then remove the batteries by reversing the installation procedure.